

MultiTrack ONE Device




Indicates Device is OFF



Indicates Device is ON

Turning On and Off


To turn the device 'On' or 'Off', remove the connector cover from the end of the device. Then invert and replace the connector cover so that the word 'Off' or 'On', whichever is desired is visible.

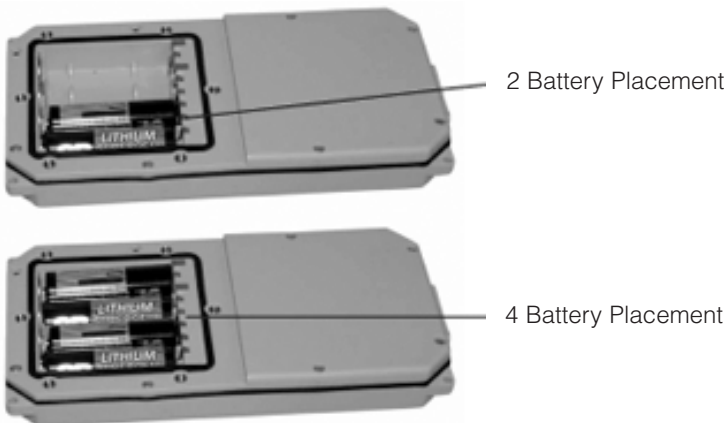

Installing Batteries

The MULTITRACK ONE is powered by two or four Lithium 'AA' batteries. The battery compartment is accessible from the top of the device by removing the six flat-head screws. Remove the water-tight cover and insert the batteries as indicated. If using only two batteries, place both batteries together on one side of the MULTITRACK ONE device as shown below.

- Note that when using two batteries they should only be put in the slots as shown above.
- When the batteries are removed and replaced the device will retain its configuration.

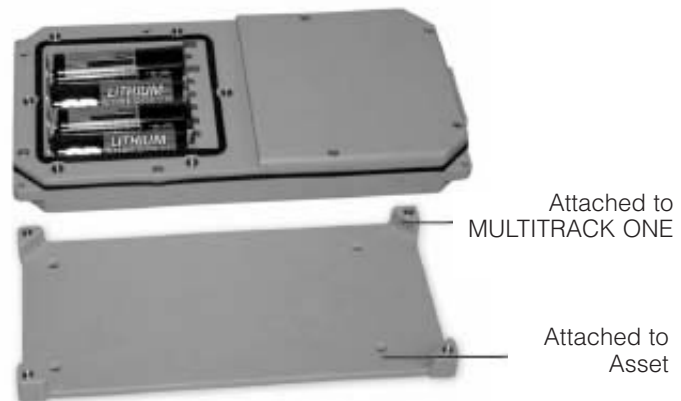

Mounting

The MULTITRACK ONE is designed to be mounted to an asset using double-sided adhesive tape and/or the included mounting bracket. The mounting bracket has four screws that attach to the asset and allows the MULTITRACK ONE to be mounted pointing towards or away from the asset. This enables the antenna to have a direct view of the sky with mounting flexibility. The MULTITRACK ONE attaches to the mounting bracket using four Phillips-head screws.